


aftermarket replacement for:  
**F/AE**  
 type stc - 1 screw part#112221000-K

**XFM-FA123**  
 STONE & ROCK CRUSHER

CUTTER TYPE	STEEL TYPE	STEEL HARDNESS	SINGLE BOLT REQUIRED	WEIGHT
Rock/Wood	42CrMo	HRC40-42	(1) M24x2.0x70	6.15 lbs

A	B	C
LENGTH	WIDTH	WIDTH
2-5/8"	3"	2-9/16"

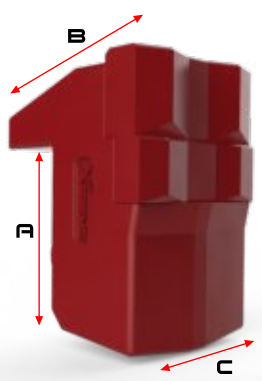


aftermarket replacement for:  
**F/AE**  
 type stc - 1 screw part#112800059-K

**XFM-FA124**  
 HEAVY DUTY STONE & ROCK CRUSHER

CUTTER TYPE	STEEL TYPE	STEEL HARDNESS	SINGLE BOLT REQUIRED	WEIGHT
Rock/Wood	42CrMo	HRC40-42	(1) M24x2.0x70	6.20 lbs

A	B	C
LENGTH	WIDTH	WIDTH
2-5/8"	3"	2-9/16"

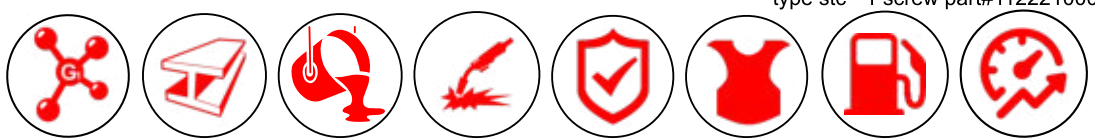


aftermarket replacement for:  
**F/AE**  
 type stc - 1 screw part#112221000-K

**XFM-FA125-HF**  
 HEAVY DUTY WOOD & ROCK C/W HARDFACING

CUTTER TYPE	STEEL TYPE	STEEL HARDNESS	SINGLE BOLT REQUIRED	WEIGHT
Rock/Wood	42CrMo	HRC40-42	(1) M24x2.0x70	5.51 lbs

A	B	C
LENGTH	WIDTH	WIDTH
2-3/4"	3-3/8"	2-15/16"

**1 SCREW HOLDER**

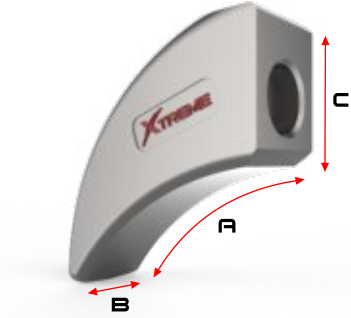

**XFM-FA126-H**

TOOTH HOLDER FIT 14" DIA DRUM

STEEL TYPE	STEEL HARDNESS	BOLTS REQUIRED	WEIGHT
42CrMo	HRC40-42	(1) M16x1.5x40 SKT (1) M16x1.5x70 SKT	9.95 lbs

A	B	C
LENGTH	WIDTH	LENGTH
6-1/2"	2-3/8"	3-1/8"


aftermarket replacement for:  
**F/AE**  
 type stc - 2 screw part#112215000-K



**XFM-FA131**  
 STONE & ROCK CRUSHER


CUTTER TYPE	STEEL TYPE	STEEL HARDNESS	BOLTS REQUIRED	WEIGHT
Rock/Wood	42CrMo	HRC40-42	(1) M16x1.5x SKT (1) M16x1.5x SKT	5.28 lbs

A	B	C
LENGTH	WIDTH	WIDTH
4-1/4"	1-7/8"	2-3/8"

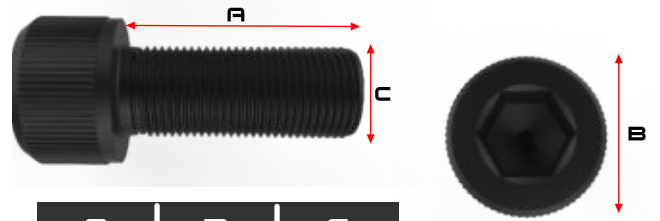

## SOCKET BOLTS

PART NUMBER	THREAD SIZE	MATERIAL TYPE	GRADE	HEAD TYPE	DRIVE SIZE	A	B	C	FIT
						LENGTH	DIA	DIA	
M16x1.5x80 SKT	M16x1.5	Black Oxide Alloy Steel	12.9	Socket	14mm	80mm	24mm	16mm	XFM-FA128-HF, XFM-FA130, XFM-FA215-SL, XFM-FA223-SR
M16x1.5x120 SKT	M16x1.5	Black Oxide Alloy Steel	12.9	Socket	14mm	120mm	24mm	16mm	XFM-FA128-HF, XFM-FA130, XFM-FA215-SL, XFM-FA223-SR
M24x2.0x70 SKT	M24x2.0	Black Oxide Alloy Steel	12.9	Socket	19mm	70mm	36mm	24mm	XFM-FA123, XFM-FA124, XFM-FA125-HF, XFM-FA127



## SERRATED WASHERS

PART NUMBER	MATERIAL TYPE	MATERIAL HARDNESS	SERRATED	A	B	C	FIT BOLTS SIZE
				OD	ID	THICKNESS	
M16W	Black Oxide Alloy Steel	C40	TOP & BOTTOM	23.95mm	17.08mm	1.26mm	M16
M24W	Black Oxide Alloy Steel	C40	TOP & BOTTOM	29.85mm	20.85mm	1.86mm	M24

## IMPACT RACHET ADAPTER

PART NUMBER	MALE SOCKET SIZE	DRIVE SIZE	FITS BOLT SIZE
IMPACT-14	14mm	3/4"	M16x1.5 SKT
IMPACT-19	19mm	3/4"	M24x2.0 SKT

