



aftermarket replacement for:
JOHN DEERE
fit models - MH60C / MH60D

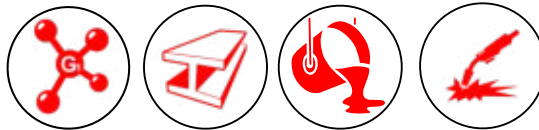


BOLT SPACING



XFM-JD142

DUAL WOOD CARBIDE TIPS

| CUTTER TYPE | STEEL TYPE | STEEL HARDNESS | DUAL BOLTS REQUIRED | WEIGHT | A | B | C |
|-------------|------------|----------------|--|----------|--------|----------|--------|
| WOOD | 42CrMo | HRC40-42 | (1) 5/8-18 x 3-1/4" SKT (1) 5/8-18 x 4-1/2" SKT | 3.33 lbs | LENGTH | WIDTH | WIDTH |
| Wood | 42CrMo | HRC40-42 | (1) 5/8-18 x 3-1/4" SKT (1) 5/8-18 x 4-1/2" SKT | 3.33 lbs | 3-7/8" | 1-15/16" | 1-7/8" |

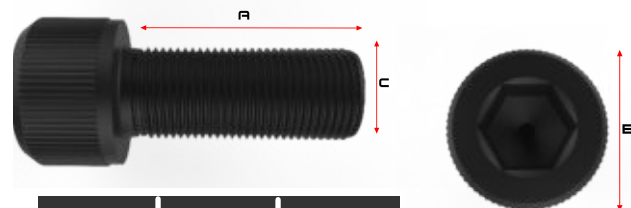


SOCKET BOLTS

| PART NUMBER | THREAD SIZE | MATERIAL TYPE | GRADE | HEAD TYPE | DRIVE SIZE | A | B | C | FIT TEETH |
|-------------------|-------------|-------------------------|-------|-----------|------------|--------|--------|------|-----------|
| | | | | | | LENGTH | DIA | DIA | |
| 5/8-18x3-1/4" SKT | 5/8-18" | Black Oxide Alloy Steel | 8 | Socket | 1/2" | 3-1/4" | 15/16" | 5/8" | XFM-JD142 |
| 5/8-18x4-1/2" SKT | 5/8-18" | Black Oxide Alloy Steel | 8 | Socket | 1/2" | 4-1/2" | 15/16" | 5/8" | XFM-JD142 |


METAL BUSHING


| PART NUMBER | MATERIAL TYPE | MATERIAL HARDNESS | A | B | C | FIT TEETH |
|-------------|-------------------|-------------------|----|------|-----------|-----------|
| | | | OD | ID | THICKNESS | |
| BUSH-1 | Oxide Alloy Steel | C40 | 1" | 5/8" | 1/2" | XFM-JD142 |



BEVELLED WASHER

| PART NUMBER | MATERIAL TYPE | MATERIAL HARDNESS | SERRATED | A | B | C | FIT TEETH |
|-------------|-------------------------|-------------------|--------------|---------|---------|-----------|-----------|
| | | | | OD | ID | THICKNESS | |
| M16W | Black Oxide Alloy Steel | C40 | TOP & BOTTOM | 23.95mm | 17.08mm | 1.26mm | XFM-JD142 |




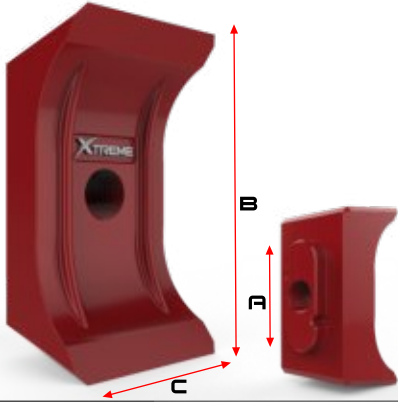

aftermarket replacement for:
JOHN DEERE
fit models - MH60C / MH60D

XFM-QU167-PL
REVERSIBLE PLANER KNIFE


| CUTTER TYPE | STEEL TYPE | STEEL HARDNESS | BOLT THREAD SIZE | WEIGHT | A LENGTH | B LENGTH | C LENGTH |
|-------------|------------|----------------|------------------|----------|-------------|-------------|-------------|
| Wood | 65Mn | HRC58-62 | 5/8"-18 | 1.95 lbs | 2-1/8" | 4-1/8" | 2" |

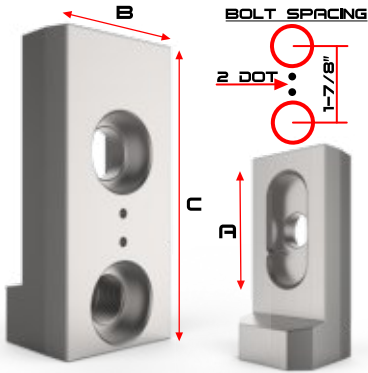

aftermarket replacement for:
JOHN DEERE
fit models - MH60C / MH60D

XFM-JD216-A
ADAPTER HOLDER

| HOLDER FOR | STEEL TYPE | STEEL HARDNESS | BOLTS REQUIRED | WEIGHT | A LENGTH | B WIDTH | C LENGTH |
|--------------|------------|----------------|--|----------|-------------|------------|-------------|
| XFM-QU167-PL | 42CrMo | HRC40-42 | (1) 5/8"-18 x 3-3/4" SKT (1) 5/8"-18 x 4" SKT | 1.69 lbs | 2-1/2" | 1-13/16" | 3-15/16" |

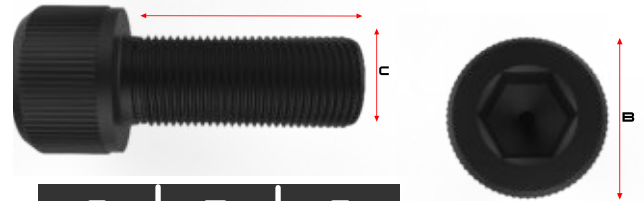


SOCKET BOLTS

| PART NUMBER | THREAD SIZE | MATERIAL TYPE | GRADE | HEAD TYPE | DRIVE SIZE | A LENGTH | B DIA | C DIA | FIT TEETH |
|-------------------|-------------|-------------------------|-------|-----------|------------|-------------|----------|----------|---------------------------|
| 5/8-18x3-3/4" SKT | 5/8-18" | Black Oxide Alloy Steel | 8 | Socket | 1/2" | 3-3/4" | 15/16" | 5/8" | XFM-QU167-PL, XFM-JD216-A |

BUSHINGS

| PART NUMBER | MATERIAL TYPE | MATERIAL HARDNESS | A OD | B ID | C THICKNESS | FIT TEETH |
|-------------|-------------------|-------------------|---------|---------|----------------|---------------------------|
| BUSH-1 | Oxide Alloy Steel | C40 | 1" | 5/8" | 1/2" | XFM-QU167-PL, XFM-JD216-A |



BEVELLED WASHER

| PART NUMBER | MATERIAL TYPE | MATERIAL HARDNESS | SERRATED | A OD | B ID | C THICKNESS | FIT TEETH |
|-------------|-------------------------|-------------------|--------------|---------|---------|----------------|---------------------------|
| M16W | Black Oxide Alloy Steel | C40 | TOP & BOTTOM | 23.95mm | 17.08mm | 1.26mm | XFM-QU167-PL, XFM-JD216-A |

